

# Blade and Teardrop Flag - Install Instructions

ESTIMATED ASSEMBLY/INSTALL TIME: 15 MINUTES


ONE PERSON REQUIRED TO ASSEMBLE/INSTALL

## CONTENTS SUPPLIED

### EACH FLAG KIT INCLUDES:

- (a) Carrying Case (1)
- (b) Poles (2, 3, or 4) Varies by flag size
- (c) Flag (1)
- (d) Bungee Cord (1)
- (e) Ground Spike (1)
- (f) Install Instructions (1)

BEFORE ASSEMBLY, PLEASE LAYOUT ALL PIECES AND CONFIRM ALL ARE INCLUDED AND ARE NOT DAMAGED

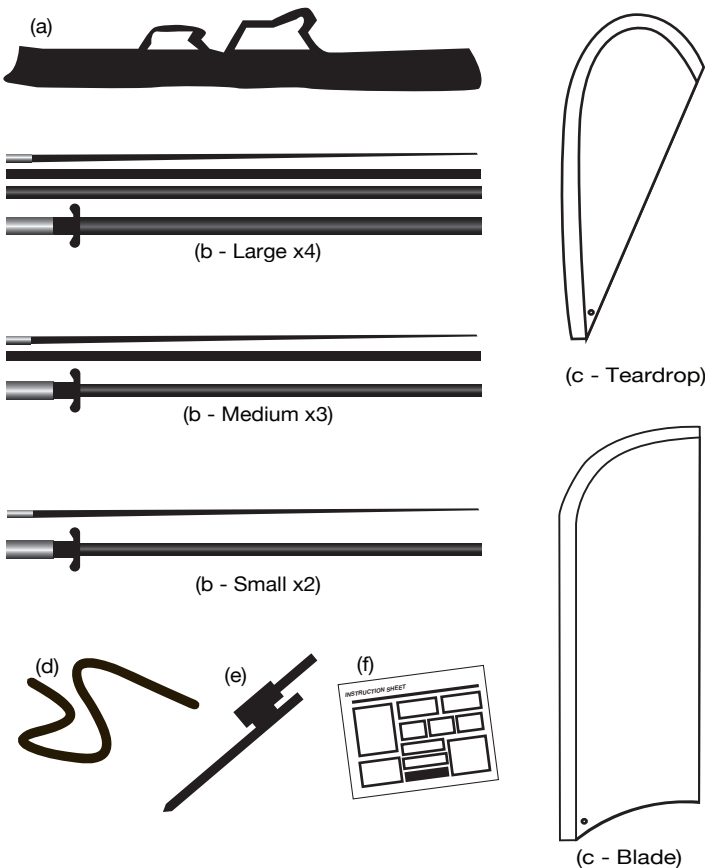

## REQUIRED TOOLS


YOU WILL NEED A HAMMER TO INSTALL THE GROUND SPIKE.



## ASSEMBLING PROCEDURE


### STEP 1

- DO NOT INSTALL NEAR TREES, WIRES, POLES OR BUILDINGS
- ALLOW A MINIMUM OF 5ft. BETWEEN BANNER POLE AND NEAREST OBJECT



### STEP 2

#### INSTALL GROUND SPIKE

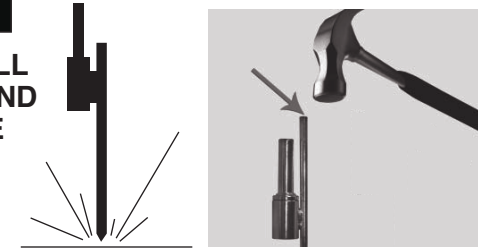

HAMMER ON THE TOP OF THE MAIN PART OF THE STEEL ROD TO INSTALL THE GROUND SPIKE.

**\*HAMMERING WRONG AREA ON GROUND SPIKE WILL DAMAGE THE GROUND SPIKE!!**

**ALWAYS USE GLOVES AND SAFETY GLASSES AND EXERCISE CAUTION WHEN USING TOOLS**

### STEP 3

**CONNECT (4) POLES Large**  
ARRANGE ALL POLES IN ORDER FROM SMALLEST TO LARGEST BEFORE ASSEMBLY.




**CONNECT (3) POLES - Medium**



**CONNECT (2) POLES - Small**




### STEP 4

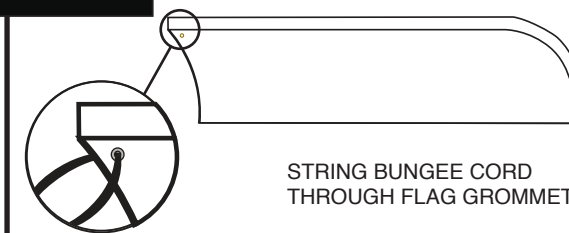

STRING BUNGEE CORD THROUGH FLAG GROMMET


### STEP 5

TIE BUNGEE ENDS

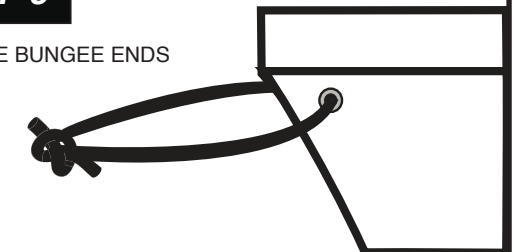


### STEP 8

INSTALL POLE ONTO GROUND SPIKE

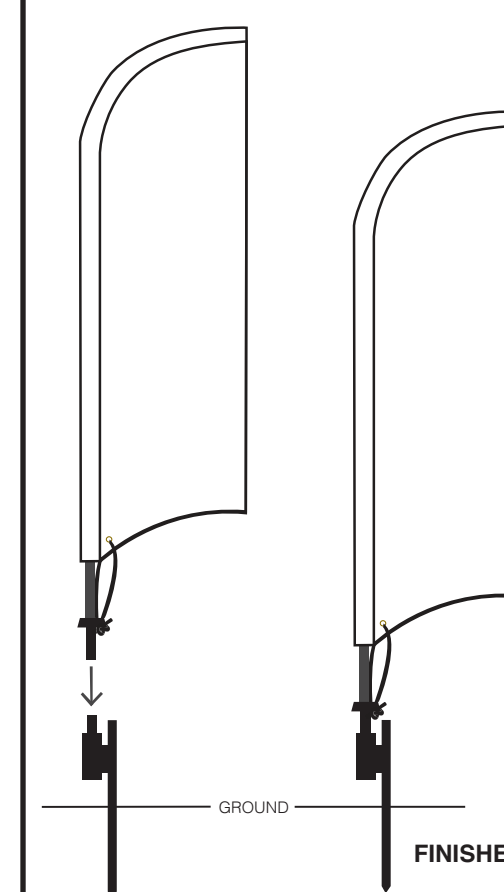


### STEP 6

SLIDE BANNER ON ASSEMBLED POLE STARTING ON SMALLEST END. MAKE SURE TO SLIDE THE POLE COMPLETELY INSIDE THE REINFORCED POCKET AT THE END OF THE POLE SLEEVE

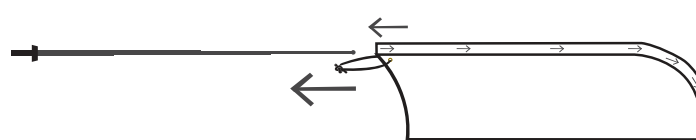

### STEP 7

LOOP BUNGEE CORD OVER BASE OF LARGEST POLE. THIS WILL PULL THE FLAG TIGHT TO THE POLE.

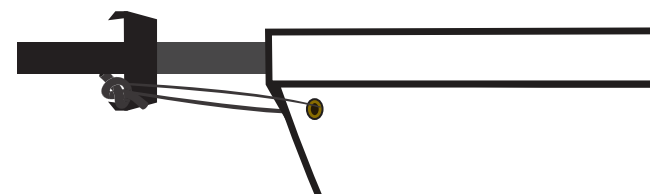

### INCLEMENT WEATHER

TAKE YOUR FLAG DOWN DURING INCLEMENT WEATHER OR HIGH WINDS

FLAGS CAN WITHSTAND A SUSTAINED WIND OF UP TO 25MPH.

DO NOT FLY YOUR BLADE FLAG IN EXTREME WINDS (24-31MPH OR 6BT AND HIGHER) AND/OR THUNDERSTORMS. DO NOT USE NEAR OVERHEAD WIRES.

EXERCISE CAUTION TO PREVENT INJURY

### CLEANING

FLAGS CAN BE WASHED IN ALL HOUSEHOLD WASHING MACHINES AT 140 F WITH REGULAR DETERGENT.

RINSE THE FLAG THOROUGHLY AFTER WASHING. HANG THE FLAG FLAT TO DRY OR INSTALL WET FLAG BACK ON THE POLE.